


WAAS CH 86234 W22A	APP CRS 223°	Rwy Ldg 8748 TDZE 36 Apt Elev 40
--	------------------------	---

RNAV (GPS) RWY 22

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME-RNP 0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Solisbury altimeter setting: increase LPV DA to 367 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 489 and all Cats visibility ½ mile; increase all MDA 60 feet and LNAV Cats C/D visibility ½ mile and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Solisbury altimeter setting.

MISSED APPROACH:
Climb to 600 then
climbing right turn to
2000 direct MAGGO
and hold.

ASOS 119,175	PATUXENT APP CON★ 127.95 314.0	WALLOPS TOWER★ 126.5 (CTAF) 306,975 (CTAF)	GND CON 127,875 269,325
------------------------	--	--	-----------------------------------

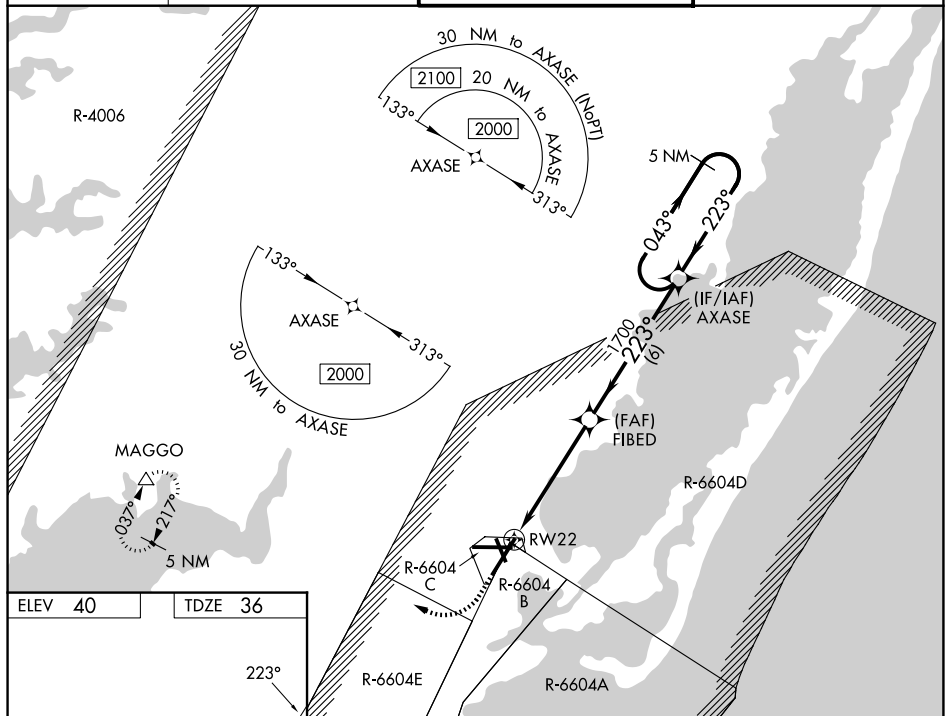

REIL all Rwy's
HIRL Rwy's 4-22, 10-28 and 17-35

CATEGORY	A	B	C	D
LPV DA	314- $\frac{7}{8}$	278 (300- $\frac{7}{8}$)		
LNAV/VNAV DA	436- $\frac{13}{8}$	400 (400- $\frac{13}{8}$)		
LNAV MDA	500-1	464 (500-1)	500- $\frac{13}{8}$	464 (500- $\frac{13}{8}$)
CIRCLING	600-1	560 (600-1)	620- $\frac{1}{2}$ 580 (600- $\frac{1}{2}$)	860- $\frac{3}{4}$ 820 (900- $\frac{3}{4}$)